

# ROZPISKA BETONÁŘSKÉ OCELI

ozn.

**P1**


OZN.	KUSŮ	Ø	DĚLKA [m(m <sup>2</sup> )]	PRŮMĚR VYZTUŽE									sít' KARI	
				6	8	10	12	14	16	18	20	25	S1	S2
1	8	12	3,84				30,7							
2	8	12	3,24				25,9							
3	8	12	2,09				16,7							
4	8	12	1,49				11,9							
5	4	12	2,38				9,52							
6	5	10	1,47			7,33								
7	5	10	1,97			9,83								
DĚLKA CELKEM				0	0	17,2	94,8	0	0	0	0	0	0	0
[kg/bm (kg/m <sup>2</sup> )]				0,22	0,4	0,62	0,89	1,21	1,58	2,00	2,47	3,85	3,03	7,9
HMOTNOST [kg]				0	0	10,6	84,2	0	0	0	0	0	0	0
HMOTNOST CELKEM										94,7 kg				
OBJEM BETONU										1,6 m <sup>3</sup>				
HMOTNOST NA 1m <sup>3</sup> BETONU										59,21 kg/m <sup>3</sup>				

## ROZMĚRY PATKY


l= 1,6 m b= 1 m h= 1 m

Dolní výztuž:


krytí c<sub>nom</sub>= 50 mm

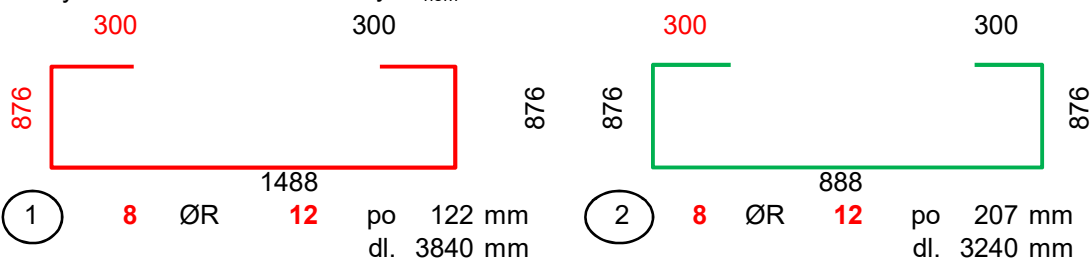

Horní výztuž:

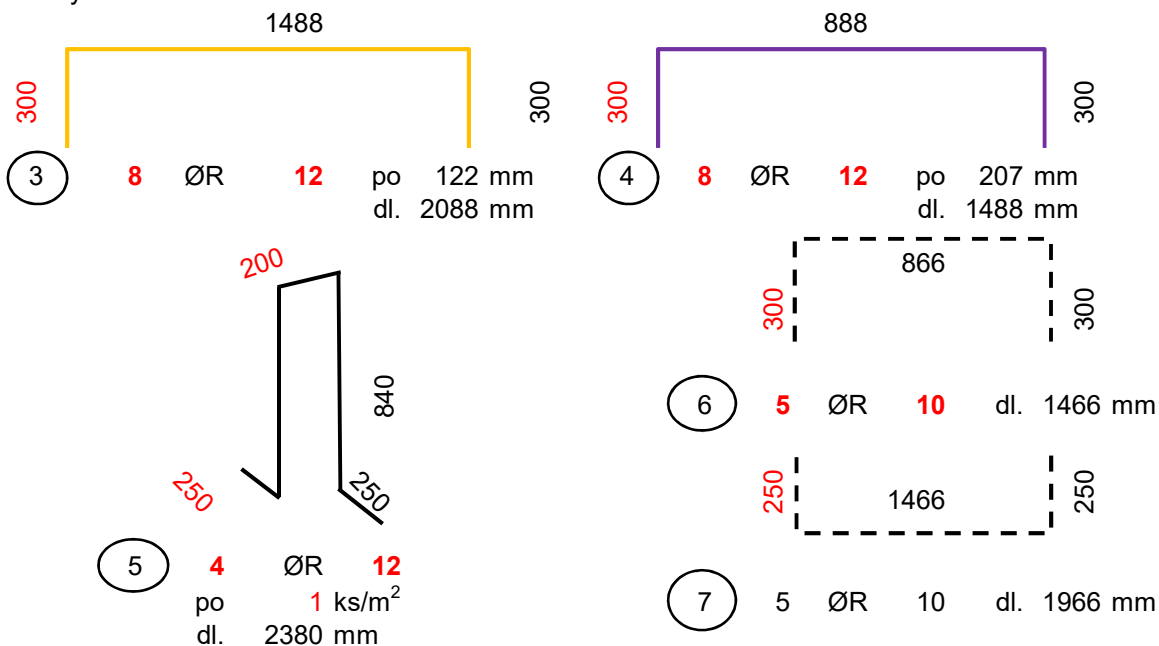

héma polohy prutů

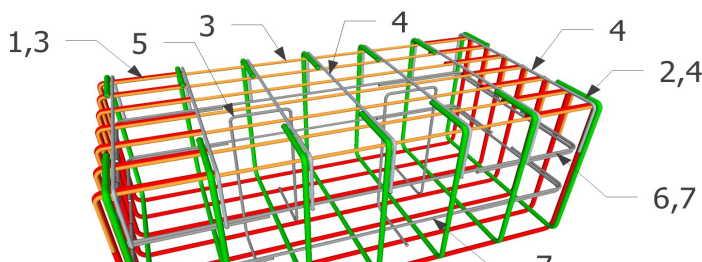

ámka:  
tří prŮmĚr zakřivení pro  
6mm 4φ, pro φ>16mm 7φ  
lka na osu prutu